

FT series FT12II

Two-way Loudspeaker System

The FT12 II is a 12" two-way full range speaker. Unit configuration: 1x12" high efficiency mid-bass unit, 1x1" exit throat 34mm titanium diaphragm HF driver with 80°×50° rotatable horn. The cabinet is made of MDF with water-based environmental protection paint.

FT12 II 是一款12"两分音全音域音箱。单元配置：1只12"高效率低音单元，1只1"喉口34芯钛膜高音驱动器配置 80°×50° 可旋转号角。箱体采用高密度复合板，水性环保喷涂制作。



FEATURES


- High quality MDF housing
- Multi-hanging points and support, easy and quick operation
- Applications: full range reinforcement, speech and conference halls, multifunction halls, classrooms , small outdoor reinforcement

产品特点

- 高强度复合板箱体
- 多吊挂点与支撑配合，操作简易快捷

适用范围

- 用于全音域扩声、语言会议系统
- 多功能厅、学校教室
- 小型室外扩声

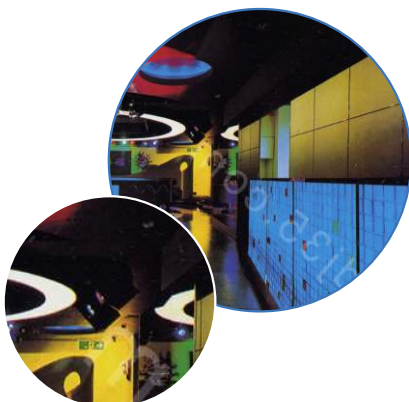

MODEL
 FREQUENCY RESPONSE(-3dB)
 FREQUENCY RESPONSE(-10dB)
 DRIVERS

RATED POWER
 SENSITIVITY
 MAXIMUM SPL
 IMPEDANCE
 DISPERSION(-6dB)
 CROSSOVER FREQUENCIES
 INPUT CONNECTORS
 PACKAGE SIZE
 NET WEIGHT
 GROSS WEIGHT

FT12 II
 45Hz-20kHz
 40Hz-20kHz
 1×12"(300mm)/2.5" voice coil LF
 1×1"(25mm)/ 1.4"voice coil HF
 250W RMS,1000W peak
 96dB 1watt/1 metre
 120 dB continuous,126 dB peak
 8 ohms nominal
 80°×50°
 2.2 kHz passive
 2×Speakon NL4
 490mm×455mm×665mm
 19 kg/pc
 21 kg/pc