



MLA208 MAseries MLA208DA

Line Array System

FEATURES

- High quality plywood with polyurea waterproof paint
- High quality neodymium components
- Patent line array horn
- Passive or Bi-amp operation
- Convenient for hanging and stacking
- Good used for moving performance, small scale theater, stadium and odeums.

系统特征

- 高质量单元配置，专利线性号角：高保真音质，投射精确
- 内、外置分频选择，操作简便灵活又可最大发挥使用者的技术优势
- 方便简捷的吊挂方式：可吊挂可堆码，安装快捷、灵活
- 超长品质保证期：品质与信心的保证

适用范围


- 体育场馆、中小型演出系统
- 剧院、音乐厅、演艺中心、会议中心

The **MLA208** is a 2.5-way mini line array loudspeaker for small and medium scale sound reinforcement, fitted with two 8" neodymium LF drivers and one 1.4" neodymium HF driver coupled to a patent line array horn, made of high quality polyurea waterproof paint. All rigging parts are made of aluminium alloy. The **MLA208DA** is equipped with FA2.36 digital amplifier module based on MLA208 to be an active line array loudspeaker.

MLA208是一款中小型、高精度线性阵列扬声器系统，它具有较小的体积和较轻重量，却有较大的声压级，应用低失真中低音单元及专利线性号角，能忠实还原规定范围内音频信号。吊挂系统采用铝合金材质，安装快捷及保证安全。单元配置：两只8"高效率强磁中低音单元，一只专利声透镜号角配置一只1.4"喉口75芯强磁高音驱动器；箱体采用多层复合夹板，聚脲喷涂。MLA208DA是在MLA208基础上配置FA2.36功放组件成为有源音箱。



CONFIGURATION

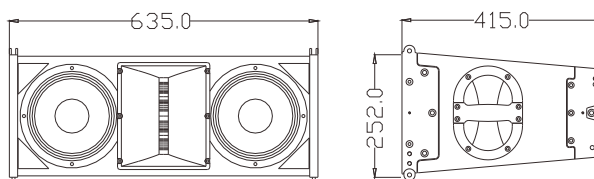

MODEL

FREQUENCY RESPONSE(-3dB)

FREQUENCY RESPONSE(-10dB)

DRIVERS

RATED POWER

SENSITIVITY

MAXIMUM SPL

IMPEDANCE

DISPERSION(-6dB)

CROSSOVER FREQUENCIES

INPUT CONNECTORS

PACKAGE SIZE

NET WEIGHT

GROSS WEIGHT

MLA208

65Hz-18kHz

60Hz-20kHz

2×8"(200mm)/2"voice coil LF

1×1.4"(36mm)/3"voice coil HF

300W RMS,1200W peak

98dB 1watt/1meter

123dB continuous,129dB peak

8 ohms nominal

Horizontal coverage:100°,

Vertical coverage:varies,depending on array length and configuration

700Hz,1.5kHz passive

2×Speakon NL4

505mm×362mm×730mm

20 kg/pc

24 kg/pc

MLA208DA

65Hz-18kHz

60Hz-20kHz

2×8"(200mm)/2"voice coil LF

1×1.4"(36mm)/3"voice coil HF

300W/8Ω+600W/8Ω

--

123dB continuous,129dB peak

--

Horizontal coverage:100°,

Vertical coverage:varies,depending on array length and configuration

--

INPUT TYPE: Balanced Differential line

505mm×362mm×730mm

22 kg/pc

26 kg/pc