

# MLA215B MLA series MLA215BA

## Line Array System




The **MLA215B** is a dual 15" low frequency enclosure designed for sub-bass reinforcement to MLA210, made of high quality plywood with polyurea waterproof paint. All rigging parts are made of aluminium alloy. The MLA215BA is equipped with BA2.88 digital amplifier module based on MLA215B to be an active subwoofer.

MLA215B是一款双15"超低音箱。采用两只15" 100芯低音单元，号角式结构设计，吊挂系统采用铝合金材质，与MLA210配合，可吊挂、可堆码，以提升系统低频表现，箱体采用多层复合夹板，聚脲喷涂。MLA215BA是在MLA215B的基础上配置BA2.88 功放组件成为有源音箱，与MLA210DA配合使用。



### CONFIGURATION

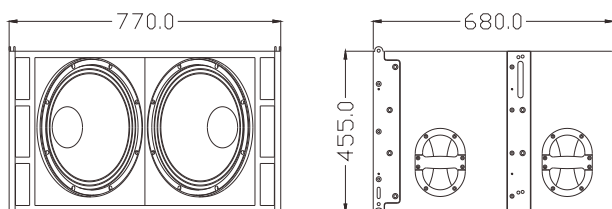

### FEATURES

- High quality plywood with polyurea waterproof paint
- Bass reflex and horn-loaded design
- High SPL
- Good used for moving performance, small scale theater and band

### 系统特征

- 高质量单元配置，高强度夹板箱体
- 推挽式设计，低音丰富自然
- 超长品质保证期：品质与信心的保证

### 适用范围

- 配合MLA210线性阵列系统，增加低音表现
- 体育场馆、大型演出
- 剧院、音乐厅、演艺中心、会议中心

#### MODEL

FREQUENCY RESPONSE(-3dB)

DRIVERS

RATED POWER

SENSITIVITY

MAXIMUM SPL

IMPEDANCE

INPUT CONNECTORS

PACKAGE SIZE

NET WEIGHT

GROSS WEIGHT

#### MLA215B

40Hz-300Hz

2× 15"(385mm)/4"voice coil LF

1200W RMS,4800W peak

101dB 1watt/1meter

132dB continuous,138dB peak

4 ohms nominal

2× Speakon NL4

860mm× 770mm× 550mm

56 kg/pc

62 kg/pc

#### MLA215BA

40Hz-300Hz

2× 15"(385mm)/4"voice coil LF

1200W/4Ω+1200W/4Ω

--

132dB continuous,138dB peak

--

INPUT TYPE:Balanced Differential line

860mm× 770mm× 550mm

58 kg/pc

64 kg/pc