



pro audio



# MLA418B MAseries MLA418BASII Line Array System

## FEATURES

- High quality plywood with polyurea waterproof paint
- Direct radiating design
- High temperature 4" (100mm) voice coil

The **MLA418B** is a single 18" low frequency enclosure designed for sub-bass reinforcement to MLA412, made of high quality plywood with polyurea waterproof paint. All rigging parts are made of aluminum alloy. The **MLA418BASII** is equipped with SA2.68II digital amplifier module based on MLA418B to be an active system to push 2pcs MLA412.

**MLA418B**是一款单18"超低音箱。采用一只18" 100芯低音单元，直射式结构设计，吊挂系统采用铝合金材质，与MLA412配合，可吊挂、可堆码，以提升系统低频表现，箱体采用多层复合夹板，聚脲喷涂。**MLA418BASII**是在MLA418B的基础上配置SA2.68II功放组件成为有源系统。

## 系统特征


- 高质量单元配置，高强度夹板箱体
- 直射式设计，低音丰富自然
- 超长品质保证期：品质与信心的保证



## 适用范围

- 配合MLA412线性阵列系统，增加低音表现
- 多功能厅、高级酒店会所
- 流动商演、乐队扩声

## CONFIGURATION

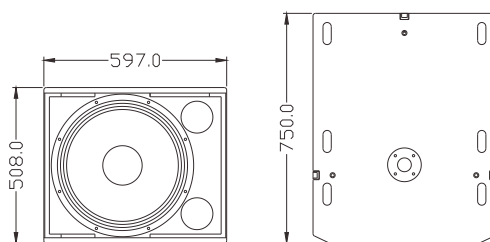

### MODEL

### FREQUENCY RESPONSE(-3dB)

### DRIVERS

### RATED POWER

### SENSITIVITY

### MAXIMUM SPL

### IMPEDANCE

### INPUT CONNECTORS

### PACKAGE SIZE

### NET WEIGHT

### GROSS WEIGHT

### MLA418B

35Hz-300Hz

1×18"(460mm)/4"voice coil LF

600W RMS,2400W peak

99dB 1watt/1meter

127dB continuous,133dB peak

8 ohms nominal

2×Speakon NL4

840mm×687mm×603mm

44 kg/pc

51 kg/pc

### MLA418BASII

35Hz-300Hz and 50Hz-20kHz

1×18"(460mm)/4"voice coil LF

900W/4Ω+1200W/4Ω

--

127dB continuous,133dB peak

--

INPUT TYPE:Balanced Differential line

840mm×687mm×603mm

46 kg/pc

53 kg/pc